
HIGH DENSITY SUB-RACK - DATASHEET

Posted on 25-06-2024 by barpaadminuser

HIGH DENSITY SUB-RACK

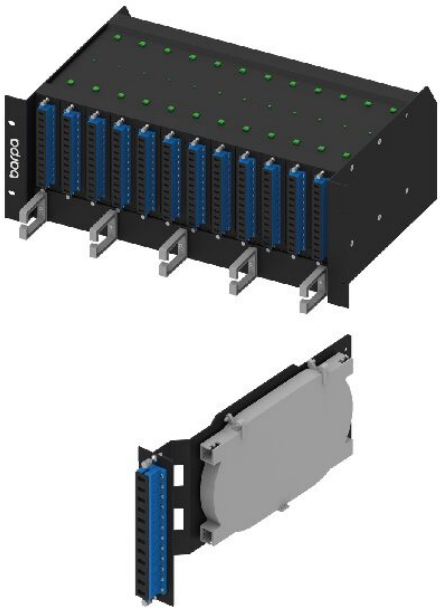

DESCRIPTION

barpa Fiber Optic High Density Sub-Rack is designed based on 4 rack unit height for use as a rack mount interconnect point where connectivity of up to 288 fibers is desired. With a modular design, it is suitable for environments where maximum flexibility is required, typically in data centers and telecommunications closets.

ROHS CE

SPECIFICATIONS

Material	Steel
Color	Black (RAL9005)
Dimensions	500x350x240mm
Quantity of Cassetes	12
Number of Splices per Cassete	12
Weight (kg)	6
Core Capacity	12 to 288
Max Diameter of Cable (mm)	22
Durability	Min. 500 Insertions
Thickness (mm)	1,5

ACESSORIES INCLUDED

• Stick with fiber attention • 2 cable glands (one big and one small)

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning it's authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are mainly illustrative.
More information: info@barpa.eu or in www.barpa.eu