

HIGH DENSITY SUB-RACK - DATASHEET


Posted on 25-06-2024 by barpaadminuser



HIGH DENSITY SUB-RACK

DESCRIPTION

barpa Fiber Optic High Density Sub-Rack is designed based on 4 rack unit height for use as a rack mount interconnect point where connectivity of up to 288 fibers is desired. With a modular design, it is suitable for environments where maximum flexibility is required, typically in data centers and telecommunications closets.

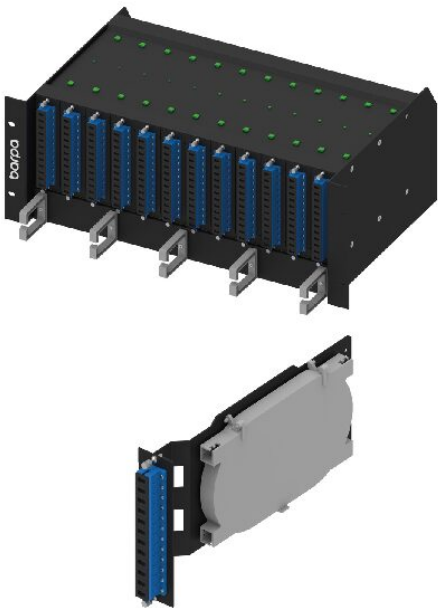

SPECIFICATIONS

Material	Steel
Color	Black (RAL9005)
Dimensions	500x350x240mm
Quantity of Cassettes	12
Number of Splices per Cassete	12
Weight (kg)	6
Core Capacity	12 to 288
Max Diameter of Cable (mm)	22
Durability	Min. 500 Insertions
Thickness (mm)	1,5

ACESSORIES INCLUDED

- Stick with fiber attention • 2 cable glands (one big and one small)

