PATCH CORD OM1 62.5/125 - DATASHEET

Posted on 25-06-2024 by barpaadminuser


PATCH CORD
OM1 62,5/125

DESCRIPTION

High performance and strong design. High quality connectors. Individually packed. Available with orange outer jacket. Dust protection caps and cable boots included, one black and the other red. Duplex clip in SC and LC connector, ST connector without clip.

APPLICABLE STANDARDS

• ISO/IEC 11801 • EN 50173-1 • IEC 61754-20 • IEC 61753-1
• IEC 61300 • RoHS

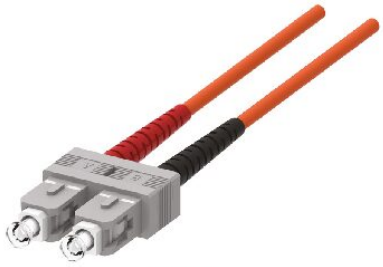

SC DUPLEX



ST DUPLEX



LC DUPLEX

ROHS LSZH 25 YEARS WARRANTY

CONNECTOR PROPERTIES

	ST	SC	LC
Insertion Loss (dB)	≤ 0,15	≤ 0,15	≤ 0,15
Return Loss (dB)	> 25	> 25	> 25
Fiber Ferrule (mm)	Ceramic 2,5	Ceramic 2,5	Ceramic 1,25
Connector Housing	Bronze	Composite	Composite
Connector Design	EC60874-10-1997	IEC61754-4	IEC61754-20

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning it's authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are mainly illustrative.
More information: info@barpa.eu or in www.barpa.eu