

SPLICE TRAY 24F - DATASHEET

Posted on 17-07-2024 by barpaadminuser

barpa

FIBER OPTIC SPLICE TRAY 24 FIBERS

DESCRIPTION

barpa's splice tray accommodates up to 24 mechanical splices. Its unique design allows for removal without disturbing previously spliced fibers, offering greater flexibility for adding new splices.




SPECIFICATIONS

Number of Splices per Casette	24
Material	ABS
Color	Black
Dimensions (mm)	171 x 117 x 8,5
Weight (kg)	0,05
Max Diameter of Cable (mm)	5
Working Temperature (°C)	Max. 95°C
Heat-Shrink Fusion Splice Protectors (mm)	45 and 60

LOGISTICS INFORMATION

Code	Paper Bag		Outer Box	
	Dimensions (mm)	Quantity (un)	Dimensions (mm)	Quantity (un)
81420100001	150x190	1	510x300x400	150

TECHNICAL DRAWING (mm)

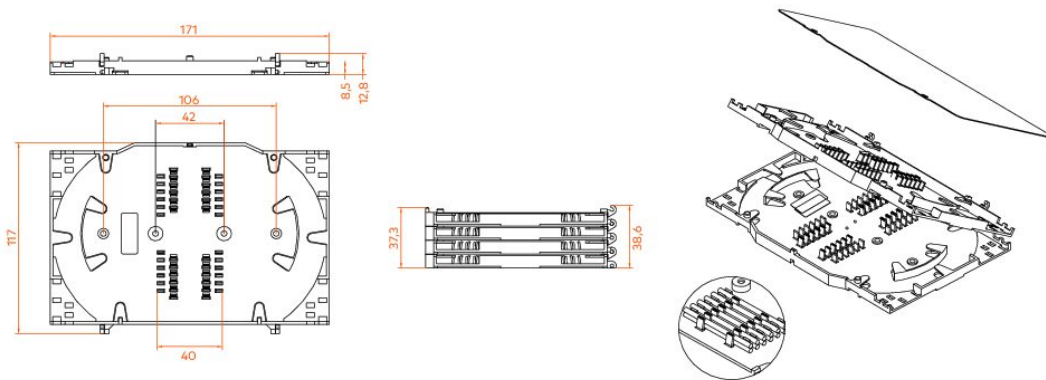

This document is authored and owned by barpa. It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice. The pictures/drawings are merely illustrative.

More information: info@barpa.eu or in www.barpa.eu

datasheet n° b167_1 | date: 02/25
approved by: Ana Barbosa

