

PRODUCT DESCRIPTION

CONTROL PLATFORM:

- Control platform with LCD, keyboard, mouse and single ports VGA KVM switch;
- 1U height, suitable for 19" standard cabinet installation and metal structure;
- 17" LED screen with high brightness, high clear and high resolution;
- Control platform can be totally pulled out from the cabinet and the LCD screen can be turned on to 120 degrees;
- Ultra thin keyboard with keypad;
- Mouse touch board with two function button;
- Front panel with lock to prevent damage by accident;
- Built-in power;
- Automatic power on/off. When pulling control platform out from cabinet, the power turns off automatically. When pushing it into the cabinet, the power turns on automatically;
- An easy to use OSD menu.

SWITCH:

- One control platform can control 1pc computer by direct connection;
- Be compatible with USB/PS.2 standard interface;
- Support VGA, SVGA, XGA video input;
- Accord with DDC, DDC2, DDC2B standard and VESA standard;
- Support maximum resolution of 1920 x 1080;
- Support multiple operating systems: WIN95/98/98SE/ME/200X/XP/WIN7/ NT, UNIX, LINUX.






• SPECIFICATIONS			
Computer Connection (Ports)		1	8
CPU Port Selection		Front panel buttons / OSD menu	
Console Connector	Keyboard	Disassembled standard 99-key keyboard	
	Mouse	Standard PS/2 touch pad; rear side with USB connector	
	Video	17 inch SXGA color TFT-LCD	
Cable Connectors	Keyboard	1 x PS/2 female (purple), 1 x USB female	
	Mouse	1 x PS/2 female (green), 1 x USB female	
	Video	1 x HDB-15 male (blue)	
LED's	Online	1 red LED's	
	Selected	1 green LED's	
LCD Monitor	Monitor	17.0" SXGA Color TFT-LCD	
	Visible Square	304.128(H) x 228.096(V) mm	
	Resolution(max)	1920 x 1080 60HZ	
	Support Color	16.2 M / 262K colors	
	White Luminance	250 (center, Typ)@ 60 mA	
	Contrast	700:1 (Typ)	
	Back Light	LED	
	Pixel Pitch	0.297 (per one triad) x 0.297	
	LCD MTBF	50.000 hours	
	Input Power	DC 12 V	
Keyboards	Keyboard	99 keys	
	Compatible IBM/AT	Win95/98/98SE/ME/200/Win7 XP Vista WinNT Uni Linux	
	Port	Standard PS/2 & USB	
	Using Life	> 1.000.000 times	
Mouse	X/Y Resolution	1000 dots/inch 40x40/mm	
	Hardware Connector	Standard PS/2 & USB	
	OS Support	Win95/98/98SE/ME/200X/Win7/XP/Vista/Win7/NT/UniX/Linux	
	Using Life	> 1.000.000 times	
Power	Power (AC)	~100V-240V	
	Using Life	MTBF > 60.000 hours 25 °C	
Housing		Metal (black)	
Gross Weight (kg)		21.35	22.74
Dimensions (mm)		640 x 443 x 42	
Rack Installation Depth (mm)		800 - 1200 (adjustable)	800 - 1200 (adjustable)
Operating Temperature (°C)		0 to +50	
Storage Temperature (°C)		-20 to +60	

• ORDER INFORMATION				
Code	Description	Unit Weight (kg)	Unit Dimmensions (mm)	Quantity (un)
82371117010	KVM Switch VGA 17" LCD 1 Port	21	805 x 695 x 190	1
82371117080	KVM Switch VGA 17" LCD 8 Ports	22.5	805 x 695 x 190	1
82372010000	IP Card for KVM Switch	0.07	110 x 68 x 22	1



KVM SWITCH VGA 17" LCD

TECHNICAL DRAWING (mm) - 1 PORT

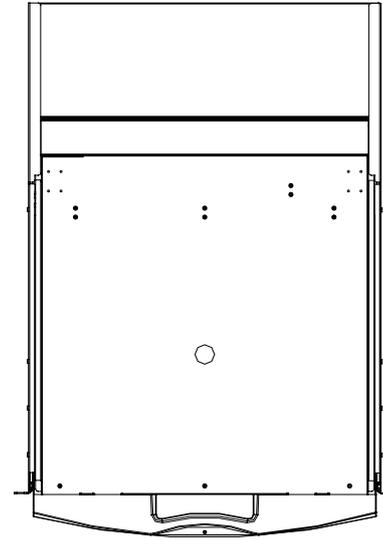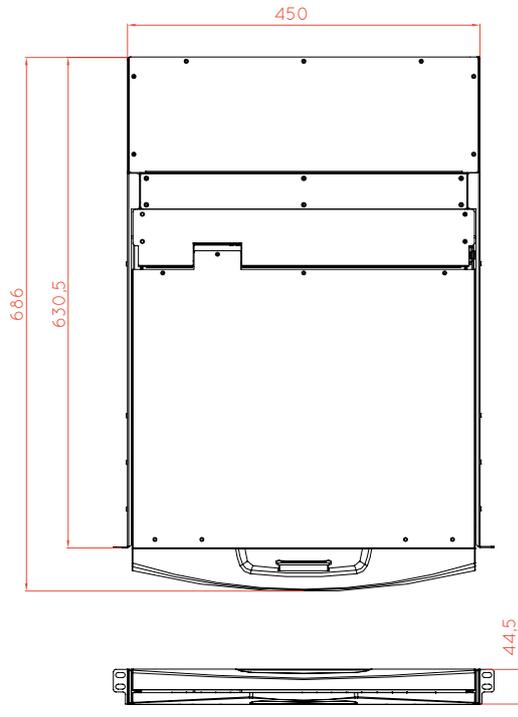

TECHNICAL DRAWING (mm) - 8 PORTS

