TERMINATION BOX FOR 24 FIBERS



DESCRIPTION

barpa Termination Box is used in FTTH access network as a termination point for the feeder cable to connect with drop cable. Suitable for inside or outside applications, with the function of mechanical splice or fusion, was designed to enlarge fiber capacity and save cost. With a waterproof, dust-proof and wet-proof design, has a total enclosed structure. With a capacity of 24 fibers.

ROHS

SPECIFICATIONS

Material	ABS/PC
Color	White
IP	IP 65
Dimensions (mm)	331x274x96
Applicable Environment	Indoor or Outdoor
Installation	Wall Mounting or On The Pole
Operating Temperature (°C)	-40 to 80
Weight (kg)	1,30
Capacity	24 fibers 24 SC Adapters

ACCESSORIES INCLUDED

12 small cable ties
3 cage nut fixing set
24 fusion splice sleeve
1 Screw lock

ORDER INFORMATION


		Inner Box		Outer Box	
Code	Unit Weight (g)	Dimensions (mm)	Quantity (un)	Dimensions (mm)	Quantity (un)
81602030241	1,30	325x245x105	1	500x330x525	10


This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.
More information: info@barpa.eu or in www.barpa.eu


datasheet nº b113_3 | date: 06/26
approved by: Ana Barbosa


TERMINATION BOX FOR 24 FIBERS


TECHNICAL DRAWING (mm)

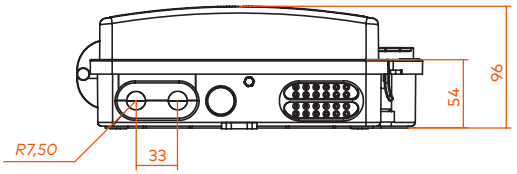

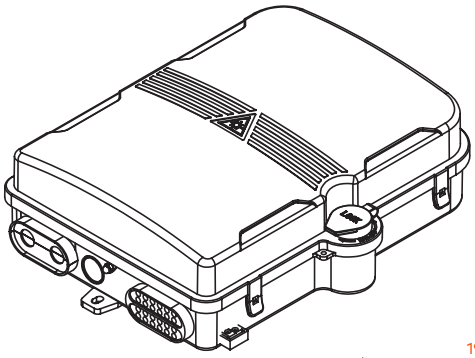

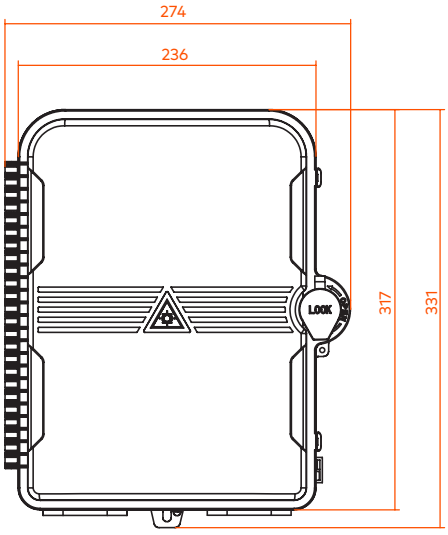

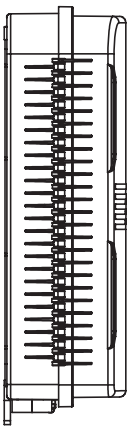

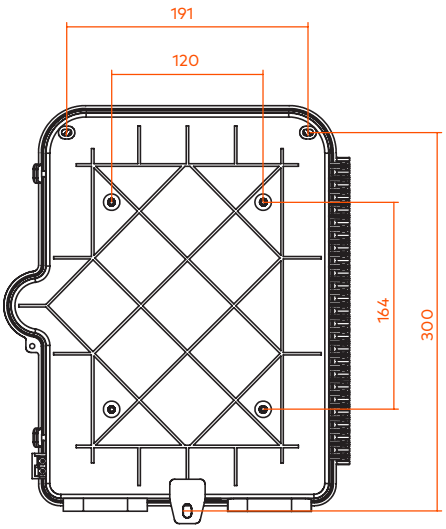

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.
More information: info@barpa.eu or in www.barpa.eu