


ENTERPRISE/DATA CENTER COPPER CABLE CAT7 S/FTP - LSZH - 23 AWG - 0,56mm

DESCRIPTION

Performance specified up to 600MHz and tested up to 1000MHz. Individual foil pairs with external S foil. Decreasing length cable markings - Easy identification of remaining cable reduces installation time and cable scrap. Designed to Support all Class F protocols including 10GBASE-T. Supports Power Over Ethernet (PoE), Power Over Ethernet Plus (PoE+), High Power Ethernet (PoE++) and 4 Pair Power Over Ethernet (4PPoE) Applications.

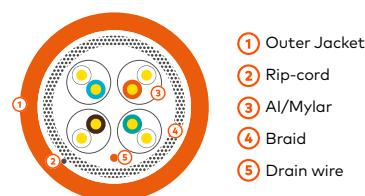

APPLICABLE STANDARDS

Electrical Performance:

• ISO/IEC 11801 • ISO/IEC 61156-5 • EN 50173 • EN 50288-4-1 ANSI/ TIA-568-D.2

Reaction to fire:

• IEC 60332-3-22 • IEC 60754 • IEC 61034 • EN 50267-2-3 • EN 13501-6
• EN ISO 1716:2010 • EN 50575

PoE:

• IEEE 802.3bt PoE Type 1, 2, 3 and 4.



CONSTRUCTION

Category		CAT 7 S/FTP			
Conductor	Material	Solid Bare Copper			
	Nom O.D.	0,56 ± 0,005 mm			
		0,022 in			
Insulation	Material	Skin-foam-skin PE			
	Diameter	1,330 ± 0,05 mm			
		0,052 in			
Sheath	Thickness	0,55 ± 0,05 mm			
		0,022 in			
	External O.D.	7,8 ± 0,5 mm			
		0,307 ± 0,019 in			
	Material	LSZH (complies RoHS)			
Rip-cord	Color	Orange (RAL2003)			
		Yes			
Core Color	Pair 1	White & Blue / Blue	Pair 2	White & Orange / Orange	
	Pair 3	White & Green / Green	Pair 4	White & Brown / Brown	



ENTERPRISE/DATA CENTER COPPER CABLE CAT7 S/FTP - LSZH - 23 AWG - 0,56mm

SHEATH PHYSICAL PROPERTIES

Before Aging Tensile Strength (Mpa)	≥ 10,0
Before Aging Elongation (%)	≥ 125
Aging Period (°C x hrs)	100°C x 24h x 7d
After Aging Tensile Strength (Mpa)	≥ 80
After Aging Elongation (%)	≥ 100
Cold bend (-20±2°C x 4h)	8xCable O.D., No visible cracks

ELECTRICAL CHARACTERISTICS (20°C)

	Typical barpa values	Standard values
1-100MHz - Impedance (Ω) 100-250MHz - Impedance (Ω) 250-600MHz - Impedance (Ω)	100 ± 15 100 ± 18 100 ± 25	-
1-600MHz - Delay Skew (ns/100m)	≤ 12	≤ 25
DC Conductor Resistance (Ω/100m)	≤ 7,2	≤ 9,38
DC Conductor Resistance Unbalance (%)	0,5% in pairs; 1,2% between pairs	≤ 2,0
Unbalance to Ground Capacitance (pf/100m)	≤ 100	≤ 330
1-600MHz - Velocity of Propagation (%) - NVP	74	-
Insulation Resistance (MΩ.km)	> 5000	-

TECHNICAL PERFORMANCE (100m || 328 ft.)

Frequency (MHz)	Attenuation ≤ dB		Return Loss ≥ dB		NEXT ≥ dB		PHASE DELAY ≤ ns		PSNEXT ≥ dB		ELFEXT ≥ dB		PSELFEXT ≥ dB	
	GWC	BT	GWC	BT	GWC	BT	GWC	BT	GWC	BT	GWC	BT	GWC	BT
1	2,10	1,96	20,00	32,15	78,00	98,22	570,00	479,69	75,00	96,47	78,00	92,01	75,00	89,29
4	3,74	3,55	23,00	34,86	78,00	98,45	552,00	462,20	75,00	96,63	78,00	94,10	75,00	90,15
8	5,24	4,92	24,50	36,92	78,00	99,07	546,70	457,08	75,00	95,11	75,90	92,04	72,90	87,80
10	5,86	5,49	25,00	40,24	78,00	98,60	545,40	455,77	75,00	95,06	74,00	89,01	71,00	86,57
16	7,41	7,01	25,00	39,79	78,00	99,49	543,00	453,46	75,00	96,52	69,60	87,03	66,90	83,49
20	8,29	7,91	25,00	42,29	78,00	97,23	542,00	452,53	75,00	95,86	68,00	88,22	65,00	85,63
25	9,29	8,92	24,30	41,44	78,00	97,96	541,20	451,71	75,00	95,89	66,00	84,24	63,00	81,75
31.25	10,41	10,05	23,60	41,75	78,00	98,64	540,44	450,97	75,00	96,82	64,10	83,40	61,10	81,59
62.5	14,88	14,39	21,50	36,67	75,50	96,18	538,60	449,14	72,50	93,18	58,10	78,01	55,10	74,49
100	19,02	18,22	20,10	37,54	72,40	97,26	537,60	448,21	69,40	93,39	54,00	75,83	51,00	71,53
200	27,47	26,02	18,00	33,34	67,90	96,49	536,50	447,18	64,90	94,12	48,00	60,74	45,00	57,83
250	30,97	29,18	17,30	37,69	66,40	95,04	536,30	446,92	63,40	91,54	46,00	61,21	43,00	57,76
300	34,19	32,10	17,30	29,27	65,20	92,84	536,10	446,73	62,20	90,28	44,50	58,66	41,50	55,13
400	40,01	37,50	17,30	30,36	63,40	91,83	535,80	446,46	60,40	89,70	42,00	56,20	39,00	53,20
500	45,26	42,18	17,30	27,87	61,90	94,49	535,60	446,27	58,90	91,54	40,00	52,00	37,00	49,00
600	50,10	44,19	17,30	25,62	60,70	83,14	535,50	446,07	57,70	81,92	38,40	50,40	35,40	47,40
*800	-	55,92	-	23,62	-	75,90	-	535,27	-	72,90	-	47,90	-	44,90
*1000	-	63,93	-	19,62	-	73,40	-	535,14	-	72,40	-	45,00	-	42,00

GWC = Guaranteed Worst Case // BT = barpa Typical



ENTERPRISE/DATA CENTER COPPER CABLE CAT7 S/FTP - LSZH - 23 AWG - 0,56mm

INSTALLATION

Temperature Range (Operation)	-20°C a +75°C	Temperature Range (Installation)	0°C a +50°C
Min. Bending Radius (Operation)	4D, D is the finished diameter	Max. Tensile Load (Instalaltion)	100N

CABLE MARK

barpa (code) category 7 S-FTP LSZH cable 4 pair 23 AWG Verified to ISO/IEC 61156-5, EN 50288-4 NVP-74 ___m (produce date)

ORDER INFORMATION

Code	Type of package	Size package (mm)	Gross Weight (kg/item)	Net Weight (kg/item)	Quantity (m)	EAN	CPR Classe
82224421030C1	Drum	380x160x240	19	17.5	305	5608445014481	Cca - s1a, d1, a1
82224421050C1	Drum	380x160x390	31	28.5	500	5608445014498	Cca - s1a, d1, a1

PACKAGING

This images are merely illustratives. We want you to see the importance we attach to the packaging. We always work with products and materials that are easy to use. The drum material is Plywood. This cable Cat.7 SFTP is orange.



CPR

Available in different CPR classes. Please specify your order.

25 YEARS WARRANTY

As part of our goal to achieve quality excellence, our barpa System Warranty can give you 25 years products and solution assurance of compliance with the industry performance standard comparing with the class installed. This warranty applies to network infrastructure installations that was made by an approved barpa partner using an barpa solution (end-to-end). For more informations go to our website.

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.

More information: info@barpa.eu or in www.barpa.eu

datasheet n° b2_5 | date: 04/25

approved by: Ana Barbosa