




PATCH CORD
OM2 50/125

DESCRIPTION

High performance and strong design. High quality connectors. Individually packed. Available with orange outer jacket. Dust protection caps and cable boots included, one black and the other red. Duplex clip in SC and LC connector, ST connector without clip.

STANDARDS

- ISO/IEC 11801 • EN 50173-1 • IEC 61754-20 • IEC 61753-1
- IEC 61300 • RoHS

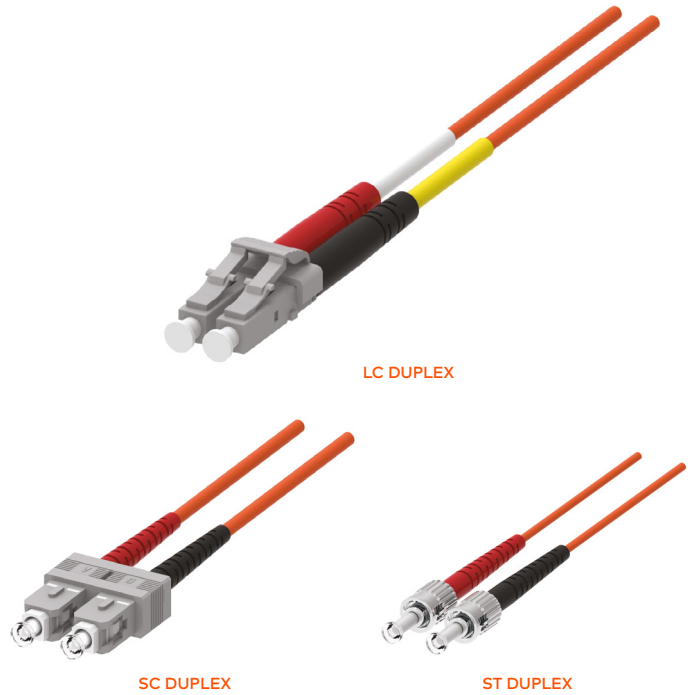

CONNECTOR PROPERTIES

	ST	SC	LC
Insertion Loss (dB)	≤ 0,15	≤ 0,15	≤ 0,15
Return Loss (dB)	> 25	> 25	> 25
Fiber Ferrule (mm)	Ceramic 2,5	Ceramic 2,5	Ceramic 1,25
Connector Housing	Bronze	Composite	Composite
Connector Design	EC60874-10-1997	IEC61754-4	IEC61754-20

This document is authored and owned by barpa. It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice. The pictures/drawings are merely illustrative.

More information: info@barpa.eu or in www.barpa.eu

CABLE PROPERTIES

	ST	SC	LC
Attenuation (dB @ 850nm)	≤ 3,5	≤ 3,5	≤ 3,5
Attenuation (dB @ 1300nm)	≤ 1,5	≤ 1,5	≤ 1,5
Bandwidth (MHz.km @ 850nm)	≥ 500	≥ 500	≥ 500
Bandwidth (MHz.km @ 1300nm)	≥ 500	≥ 500	≥ 500
Radius of Curvature (mm)	10≤r≤25	10≤r≤25	7≤r≤25
Fiber Height (nm)	-100≤h≤100	-100≤h≤100	-100≤h≤100
Apex Offset (um)	≤50	≤50	≤50
Durability	500 times	500 times	500 times
Repetitiveness (dB)	≤ 0,2	≤ 0,2	≤ 0,2
Number of Fibers	2	2	2
Weight (kg/km)	12	12	12
Outer Diameter WxH (mm)	2,00x2	2,00x2	2,00x2
Outer Sheath Colour	Orange	Orange	Orange
Outer Sheath Material	LSZH	LSZH	LSZH

MECHANICAL AND ENVIRONMENTAL CHARACTERISTICS

	ST	SC	LC
Installation Temperature (°C)	-10 to +60	-10 to +60	-10 to +60
Operating Temperature (°C)	-10 to +60	-10 to +60	-10 to +60
Storage Temperature (°C)	-40 to +80	-40 to +80	-40 to +80
Tension - Long Term (N)	100	100	100
Tension - Short Term (N)	200	200	200

DESCONSTRUÇÃO DO CÓDIGO - INFORMAÇÃO LOGÍSTICA

8 1 2 4 2 **A A** **B B** **M M**

1st CONNECTOR	A A	2nd CONNECTOR	B B	METERS	M M
SC	0 2	SC	0 2	1	0 1
ST	0 3	ST	0 3	2	0 2
LC	0 5	LC	0 5	3	0 3

PACKAGING

This images are merely illustratives. We want you to see the importance we attach to the packaging.
We always work with products and materials that are easy to use.



As part of our goal to achieve quality excellence, our barpa System Warranty can give you 25 years products and solution assurance of compliance with the industry performance standard comparing with the class installed. This warranty applies to network infrastructure installations that was made by an approved barpa Partner using an barpa solution (end-to-end). For more informations go to our website.

This document is authored and owned by barpa. It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice. The pictures/drawings are merely illustrative.

More information: info@barpa.eu or in www.barpa.eu

datasheet n° b69_2 | date: 06/24

approved by: Ana Barbosa