



TERMINATION BOX FOR 24 FIBERS



DESCRIPTION

This barpa Termination Box is used as a termination point for the income cable to connect with drop cable in FTTx communication network system. It provides solid protection and management for the FTTx network building, making sure that you can do in this box fiber splicing, splitting and distribution.

FEATURES


- Total enclosed structure.
- Material is PC+ABS, wet-proof, water-proof, dust-proof, anti-aging, protection level up to **IP65**.
- Clamping for feeder cable and drop cable, fiber splicing, fixation, storage, distribution...etc all in one.
- Cable, pigtails, patch cords are running through own path without disturbing each other, cassette type SC adaptor installation, easy maintenance.
- Distribution panel can be flipped up, feeder cable can be placed in a expression-port maintenance and installation.
- Wall-mounted or poled-mounted, suitable for both indoor and outdoor uses.

• ORDER INFORMATION

Code	Description	Size (mm)
81602030240	Termination Box for 24 Fibers	331X274X96

INSTALLATION

Cable way (Pic1)

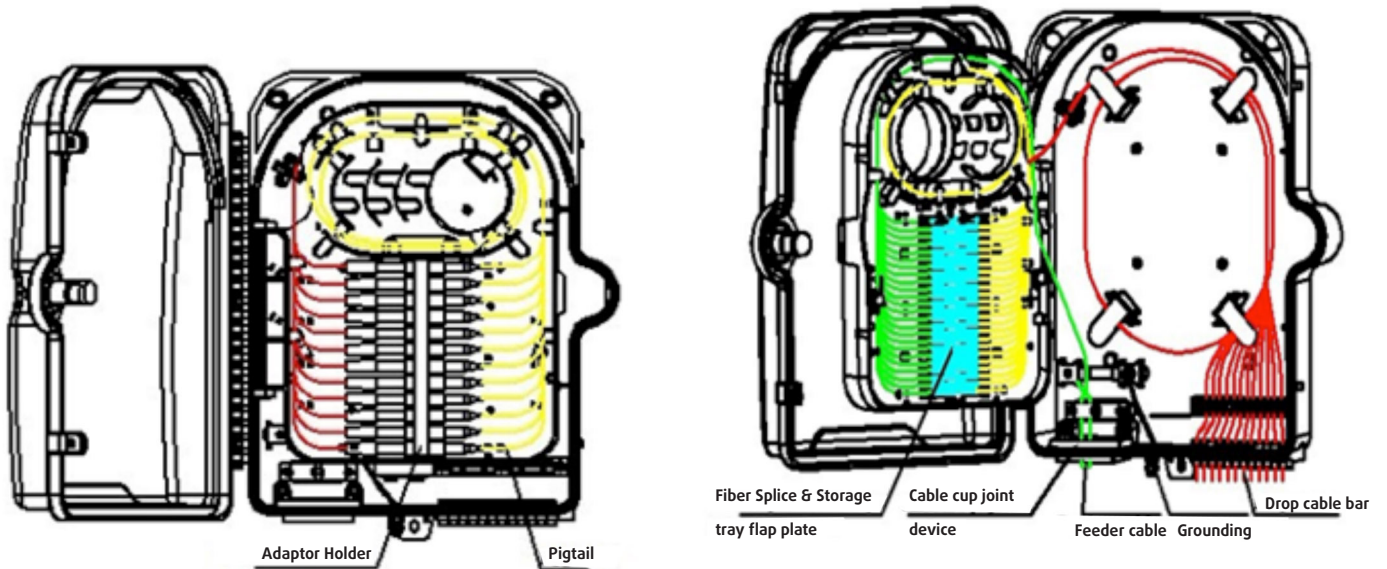


WALL-MOUNTED INSTALLATION


Drill 4 holes over the wall based on the size in technical drawing, place the expansion bolt $\Phi 7.5 \times 40$ place the box to match up the holes and use bolt to fasten (Pic2)

POLE-MOUNTED INSTALLATION

Fix 1 set of the easy pole ring to the telecom pole. (Pic2)

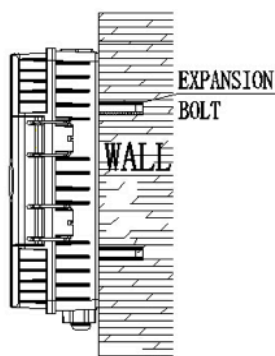

Pic2 Wall mounted installation

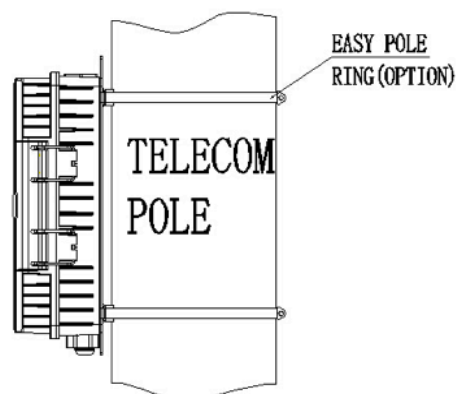

Pic 3 Pole mounted installation

TERMINATION BOX FOR 24 FIBERS

• TECHNICAL SPECIFICATIONS

Dimension(L×W×H)mm	331x274x96
Applicable Environment	Outdoor
Installation	Wall mounting or on the pole
Cable Type	FTTH cable
Operating temperature	-40~+80oC
Adapter type	SC & LC
Port of transmission	24fibers

