



RJ45 CONSOLIDATION POINT BOX

DESCRIPTION

The barpa Consolidation Point Box provides a practical and reliable solution for copper network interconnections. With an ultra-compact design making it the smallest in its category, it is designed for quick installation and facilitates efficient cable organization between horizontal and workstation links. The box allows flexible reconfiguration of network layouts without disturbing permanent cabling. Its robust metallic shielding ensures protection and durability in shielded networks.



APPLICABLE STANDARDS

- ISO/IEC 11801 Ed 2.2 • EN 50173-1 • IEC60603-7-51 • ISO/IEC 11801-1:2017
- ISO/IEC 11801-2:2017 • EN 50310 • EN IEC 61000-6-1:2019 • EN IEC 61000-6-3:2021
- EN IEC 61000-3-2:2019+A1:2021+A2:2024 • EN 61000-3-3:2013+A1:2019+A2:2021
- Directive 2011/65/EU (RoHS)

KEY FEATURES

Ultra-compact enclosure designed for maximum space efficiency, allowing installation in narrow and limited spaces, such as raised floors and suspended ceilings
Suitable for Wall, Floor, Ceiling installations
Toolles locking mechanism enables easy accessibility
Compatible with all Shielded or Unshielded RJ45 Keystones from barpa
250mm long Earth Wire included
Mounting Accessories included
Identified Ports

PHYSICAL CHARACTERISTICS

Material	SPCC Cold Rolled Steel	
Thickness (mm)	1,2	
Finish	Powder Coating	
Color	Black (RAL9005)	
Applicable Environments	Interior	
Mounting Options	Wall, Floor, Ceiling	
Number of Ports	6 or 12	
Cable Outer Diameter (mm)	≤9,0	
Dimension (mm)	6 ports	83,0 x 127,0 x 24,0
	12 ports	83,0 x 224,2 x 24,0
Unit Weight (kg)	6 ports	0,314
	12 ports	0,495

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.

More information: info@barpa.eu or in www.barpa.eu




RJ45 CONSOLIDATION POINT BOX

ENVIRONMENTAL CONDITIONS	
Operating Temperature (°C)	-30 to +70
Storage Temperature (°C)	-30 to +70

ACCESSORIES INCLUDED		
	Quantity	Details
Plastic Anchor	4	Ø8mm x 38mm
Screws	4	M4 x 30mm


LOGISTICS INFORMATION							
Code	N° Ports	Inner Box			Outer Box		
		Dimensions (mm)	Weight (kg)	Quantity (un)	Dimensions (mm)	Weight (kg)	Quantity (un)
82260101006	6	100x140x30	0,335	1	320x260x300	16,350	48
82260101012	12	100x240x30	0,528	1	320x260x300	14,650	27

6 PORTS



TECHNICAL DRAWING (mm)

12 PORTS

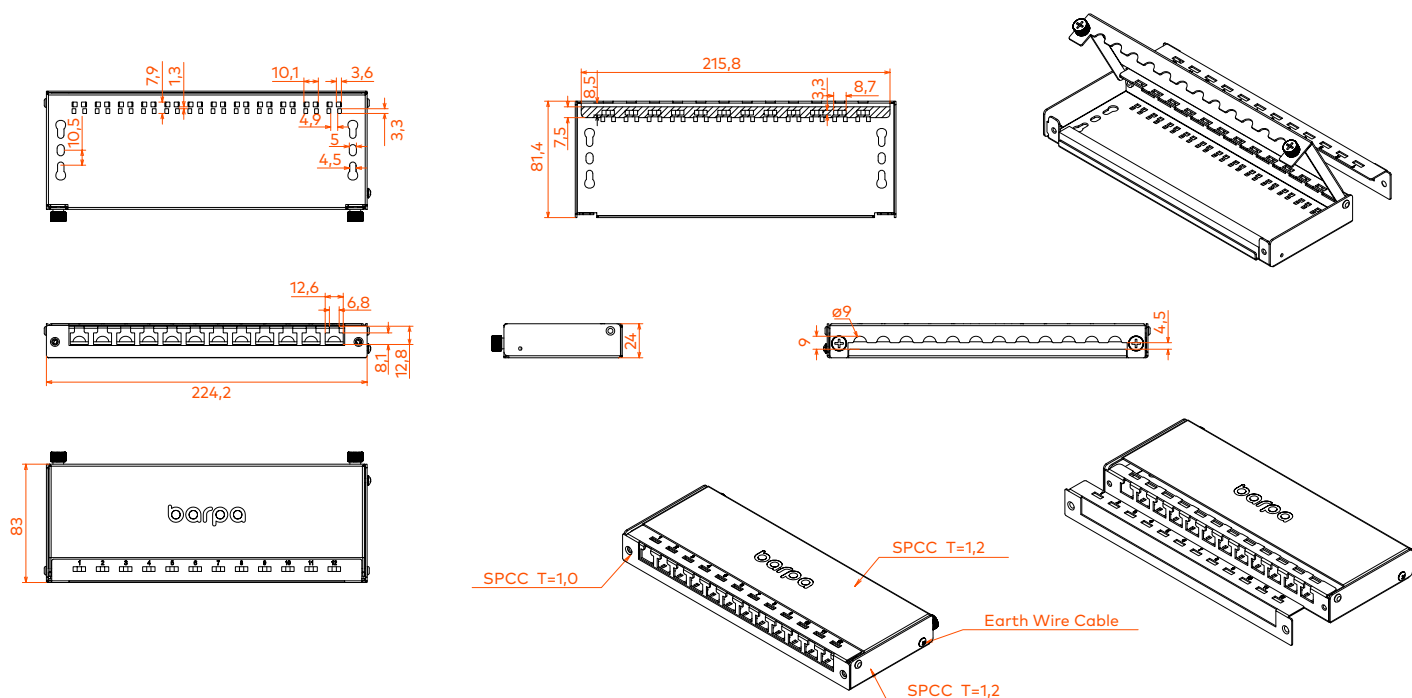

PACKAGING

This images are merely illustrative. We want you to see the importance we attach to the packaging.
We always work with products and materials that are easy to use.



As part of our goal to achieve quality excellence, our barpa System Warranty can give you 25 years products and solution assurance of compliance with the industry performance standard comparing with the class installed. This warranty applies to network infrastructure installations that was made by an approved barpa partner using an barpa solution (end-to-end). For more informations go to our website.