LC CONNECTOR AND ADAPTER CLEANING PEN

DESCRIPTION

The LC Connector and Adapter Cleaning Pen is a compact cleaning tool designed for quick and convenient maintenance of fiber optic LC connectors with 1,25mm ferrules. Its push-to-clean mechanism effectively removes dust, oil, and other contaminants from connector end faces, ensuring optimal optical performance. Providing more than 800 cleaning cycles, it is a durable and economical solution for use during installation, maintenance, and troubleshooting.



REACH ROHS

APPLICABLE STANDARDS

• Directive 2011/65/EU (RoHS); • Regulation (EC) No 1907/2006 (REACH)

MAIN FEATURES

Efficient Cleaning	Removes dust, oil, and other contaminants to maintain optimal signal quality.
Anti-Static Housing	Protects sensitive fiber optic components during cleaning.
360° Cleaning Action	Rotating cleaning tip ensures complete ferrule end-face coverage.
Click Confirmation	Audible click indicates successful cleaning operation.
Extendable Tip	The tip of the pen can be extended to reach adapters in high-density environments.

PHYSICAL SPECIFICATIONS

Dimensions (mm)	180x18x18
Weight (kg)	0,023
Color	Grey
Number of Cleaning Cycles	≥800
Compatible Connectors and Adapters	LC and MU (1,25mm Ferrules)
Compatible Connectors Angle	UPC and APC
Cleaning Method	Dry (non-abrasive, chemical free)

LOGISTICS INFORMATION

Unitary Box			Outer Box			EAN
Code	Weight (kg)	Dimensions (mm)	Weight (kg)	Dimensions (mm)	Quantity (un)	
81820101000	0,029	180x18x18	9,7	450x400x300	300	5608445047366

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.
More information: info@barpa.eu or in www.barpa.eu


datasheet nº b245_0 | date: 10/26
approved by: Ana Barbosa

LC CONNECTOR AND ADAPTER CLEANING PEN


INSTRUCTIONS

For LC Adapters


1. Remove the guide cap from the device

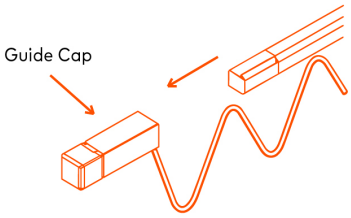

2. Insert tip of cleaner into LC Adapter

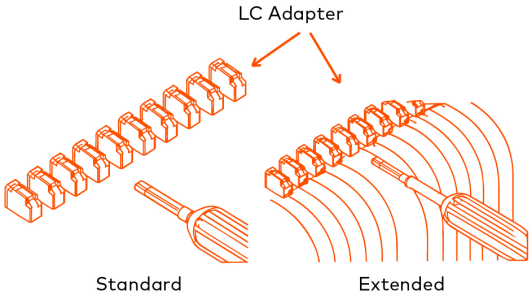


3. Push the outer shell until it clicks




For LC Connectors


1. Open the cover on the guide cap



2. Insert the connector into the guide cap

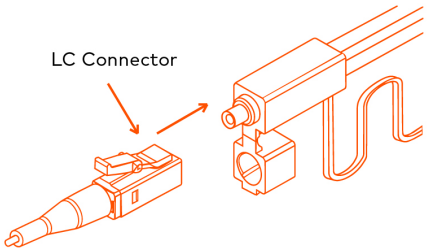

3. Push the outer shell until it clicks

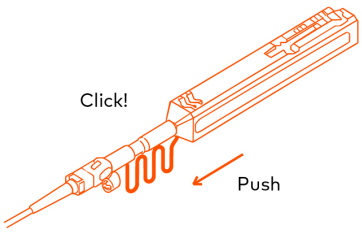

This document is authored and owned by barpa . It is forbidden to reproduce in whole or in part without mentioning its authorship, as well as modification of its content or context. All specifications are subject to change without notice.
The pictures/drawings are merely illustrative.
More information: info@barpa.eu or in www.barpa.eu